查询AD120供应商

Document Title

3-Level / 258 Outputs TFT LCD Gate Driver

Revision History

Rev. No.	History	Issue Date	Remark
0.0	Initial issue	August 10, 2001	Preliminary

Important Notice:
AMIC reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice. AMIC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of AMIC products in such applications is understood to be fully at the risk of the customer.

Features

- TFT LCD gate driver
- 3-level / 258 outputs
- 40V max. for each output
- -15V min. for each output
- 2.7V~3.6V logic input/output level
- Bi-directional data shift control
- Output waveform control
- TCP available

AD120 is a gate driver for TFT LCD panel. There are 258 outputs in the chip. Three-level output allows voltage correction for better switching noise rejection. It can be used for XGA / SXGA panels.

Block Diagram

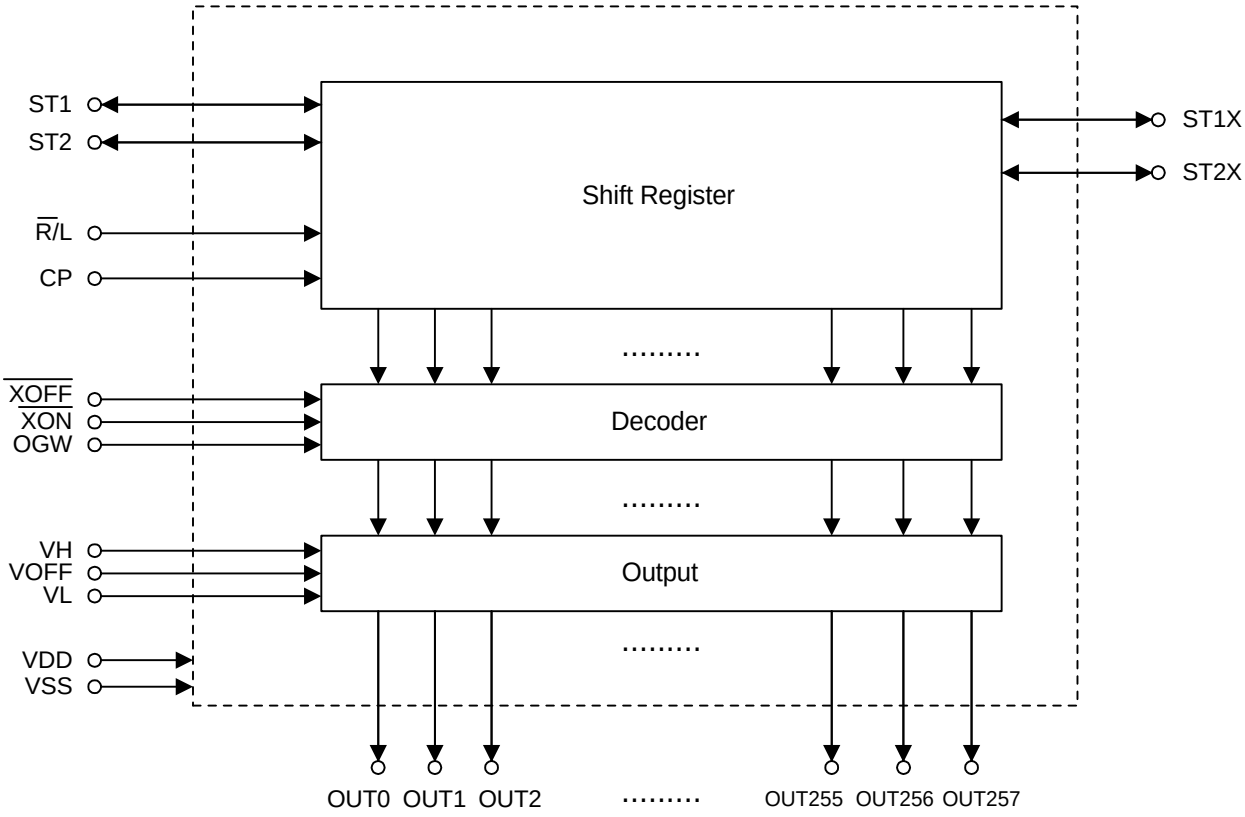

TCP Pinout

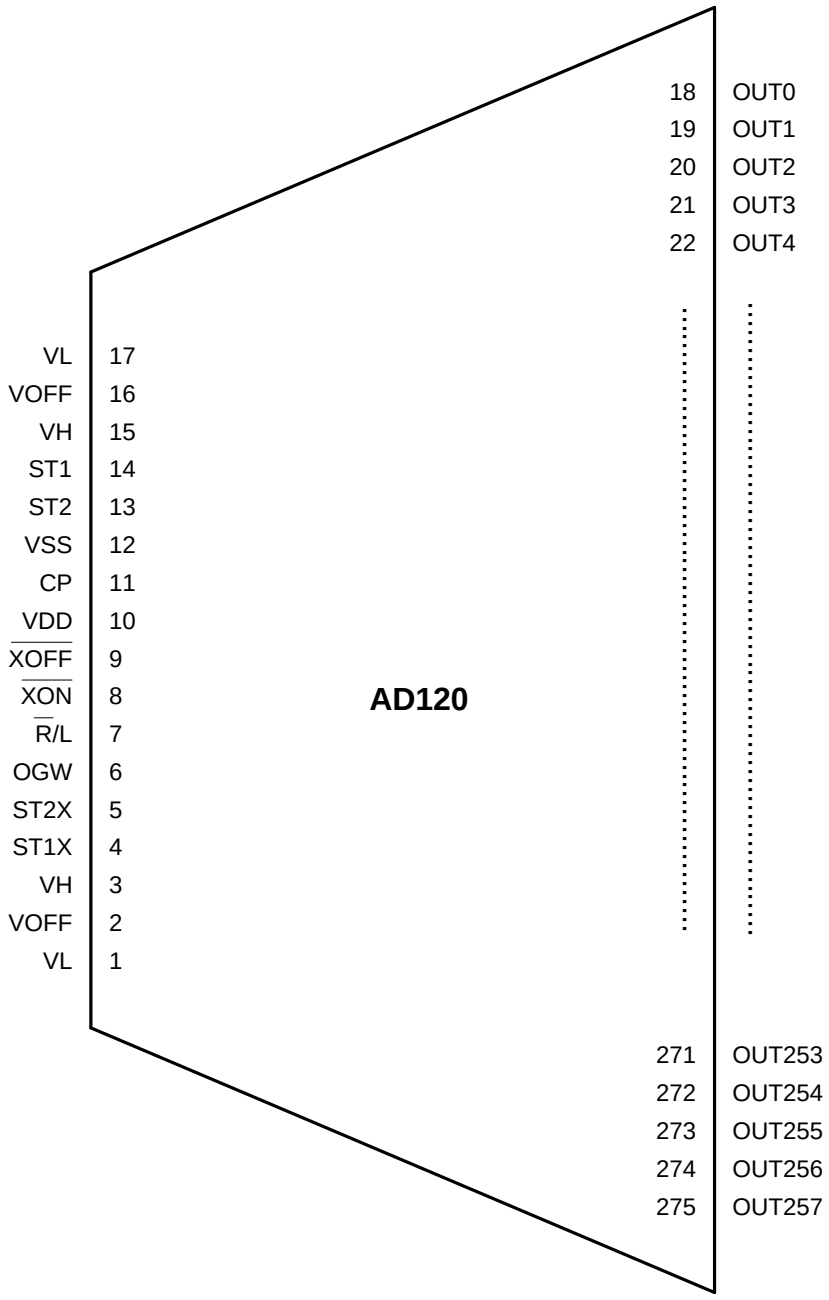
AD120
VL 17
VOFF 16
VH 15
ST1 14
ST2 13
VSS 12
CP 11
VDD 10
XOFF 9
XON 8
R/L 7
OGW 6
ST2X 5
ST1X 4
VH 3
VOFF 2
VL 1
18 OUT0
19 OUT1
20 OUT2
21 OUT3
22 OUT4
271 OUT253
272 OUT254
273 OUT255
274 OUT256
275 OUT257

Input/Output Pin Function

Pin No.	Symbol	I/O	Description
11	CP	I	Clock pulse
7	$\overline{R}$/L	I	Right / left direction control for shift register When $\overline{R}$/L is LOW, data are shifted to the right, or ST1 / ST2 output0 output1 …. output257. When $\overline{R}$/L is HIGH, data are shifted to the left, or ST1X / ST2X output257 output256 .... output0.
8	$\overline{XON}$	I	$\overline{XON}$ to force all the outputs to VH voltage. It is not synchronous to CP.
9	$\overline{XOFF}$	I	$\overline{XOFF}$ to force all the outputs to VOFF voltage. It is not synchronous to CP.
6	OGW	I	Output Gate pulse Width to select output_waveform format.
4,5, 13,14	ST1, ST2, ST1X, ST2X	I/O	When $\overline{R}$/L is LOW, ST1 / ST2 are defined as inputs while ST1X / ST2X are defined as outputs . The synchronized ST1 / ST2 signals are placed at ST1X / ST2X after 256 CP pulses. When $\overline{R}$/L is HIGH, ST1X / ST2X are defined as inputs, while ST1/ST2 are defined as outputs. The synchronized ST1X / ST2X signals are placed at ST1 / ST2 after 256 CP pulses.
18 - 275	OUT0~ OUT257	O	Output drivers These outputs are synchronized to CP pulses. The output format and voltage level are controlled by OGW, $\overline{XON}$, $\overline{XOFF}$, ST1 / ST2, ST1X / ST2X and $\overline{R}$/L correspondingly as shown in the diagram.
12	VSS	PWR	Reference voltage
10	VDD	PWR	Supply voltage for logic operation VDD and VSS are voltage levels of input / output logic signals
3, 15	VH	PWR	High voltage for output drivers
1, 17	VL	PWR	Low voltage for output drivers
2, 16	VOFF	PWR	OFF voltage for output drivers

Description

Operation

Output signals OUT0~OUT257 are used for control of the TFT gates of the LCD panel. A bi-directional shift register is implemented to sequentially output signals OUT0~OUT257. A clock pulse CP is applied to the bi-directional shift register and the direction of the register is controlled by $\overline{R}/L$ signal.

When $\overline{R}/L$ is LOW and either starting signal ST1 or ST2 goes to HIGH, the shift register starts shifting from OUT0 to OUT257. The voltages of the corresponding outputs switch to VH, VL or VOFF depending on the starting signals as shown in the diagram. The outputs of the starting signals ST1X / ST2X switch accordingly after 256 CP pulses following start of the shift register which allows expansion of the outputs by cascading more devices.

When $\overline{R}/L$ is HIGH and either starting signal ST1X or ST2X goes to HIGH, the shift register starts shifting from OUT257 to OUT0. The voltages of the corresponding outputs switch to VH, VL or VOFF depending on the starting signals as shown in the diagram. The outputs of the starting signals ST1/ST2 switch accordingly after 256 CP pulses following start of the shift register which allows expansion of the outputs by cascading more devices.

3-Level Output

V_H - V_L = 40V(max.)
V_{OFF} - V_L = 0~10V
V_H - V_{SS} = 17~28V

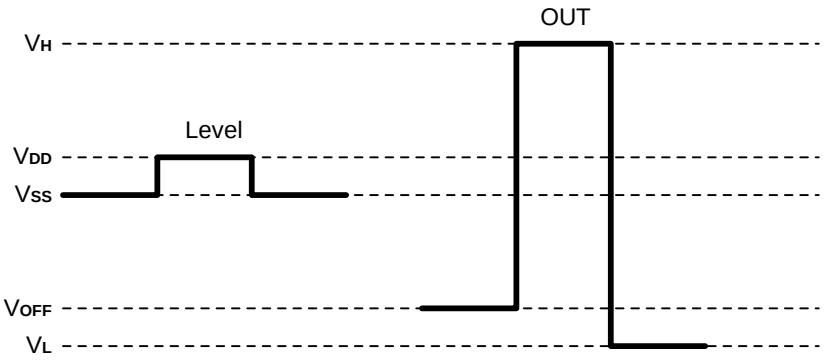

Operation Diagram 1 ($\overline{R}$/L = L, OGW = L)

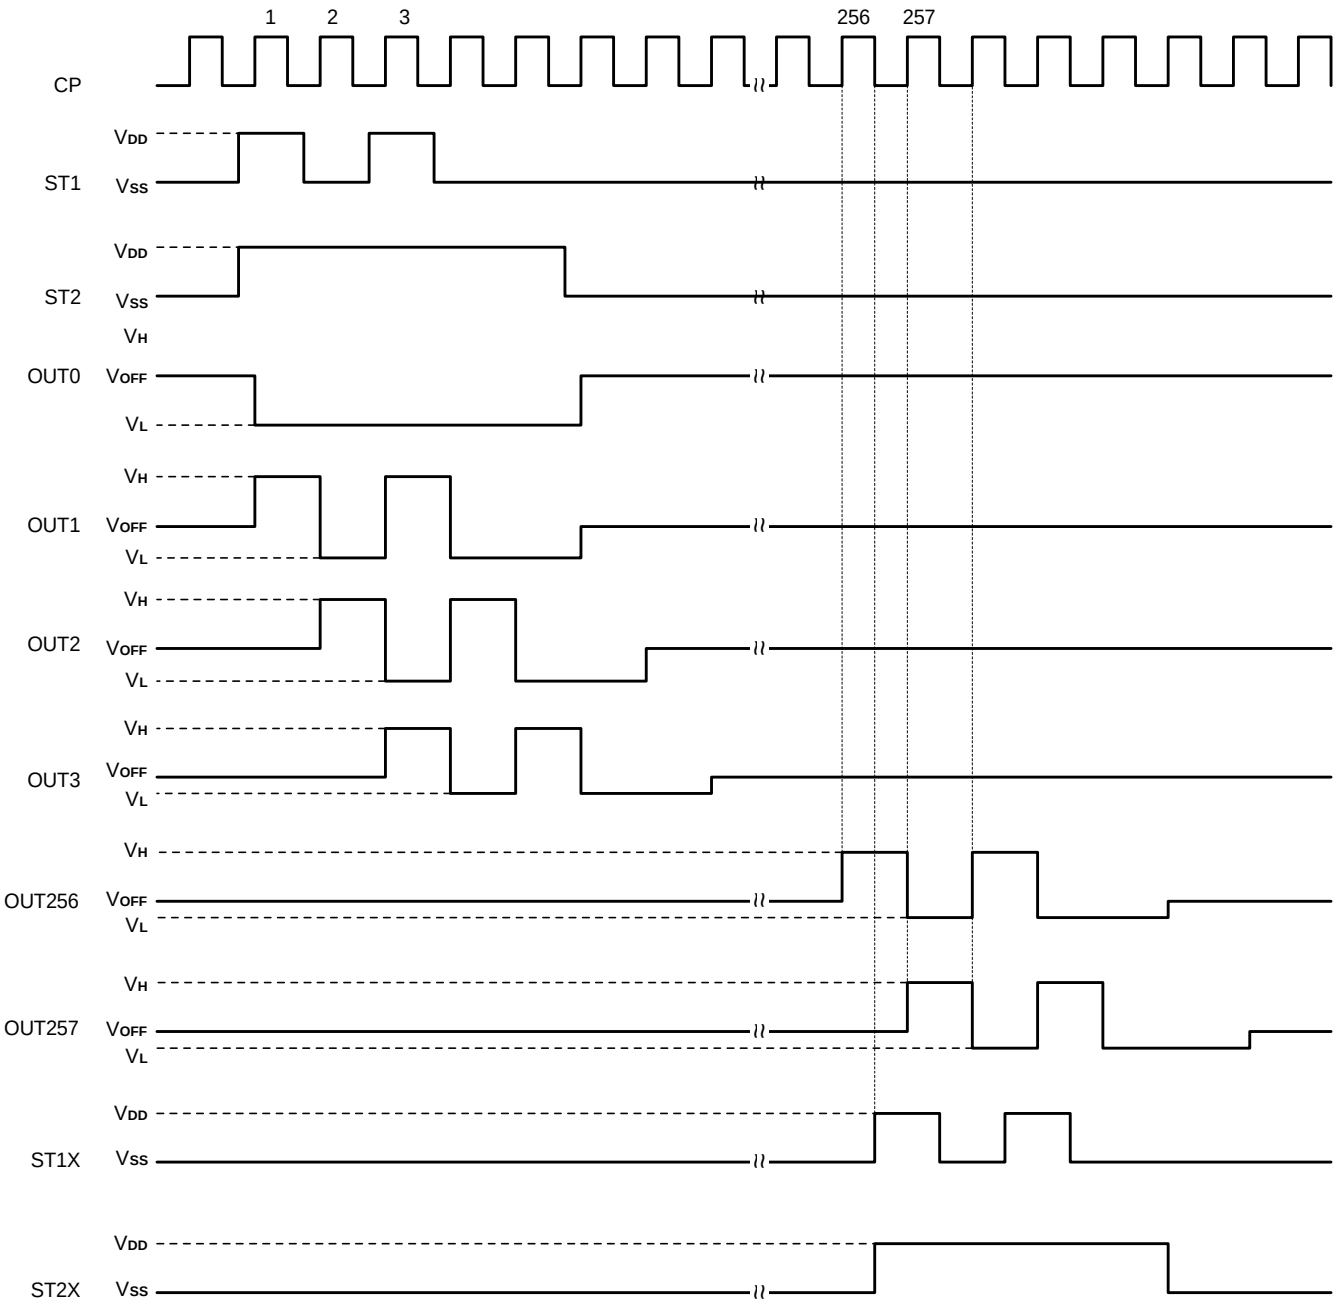

Operation Diagram 2 ($\overline{R}$/L = L, OGW = H)

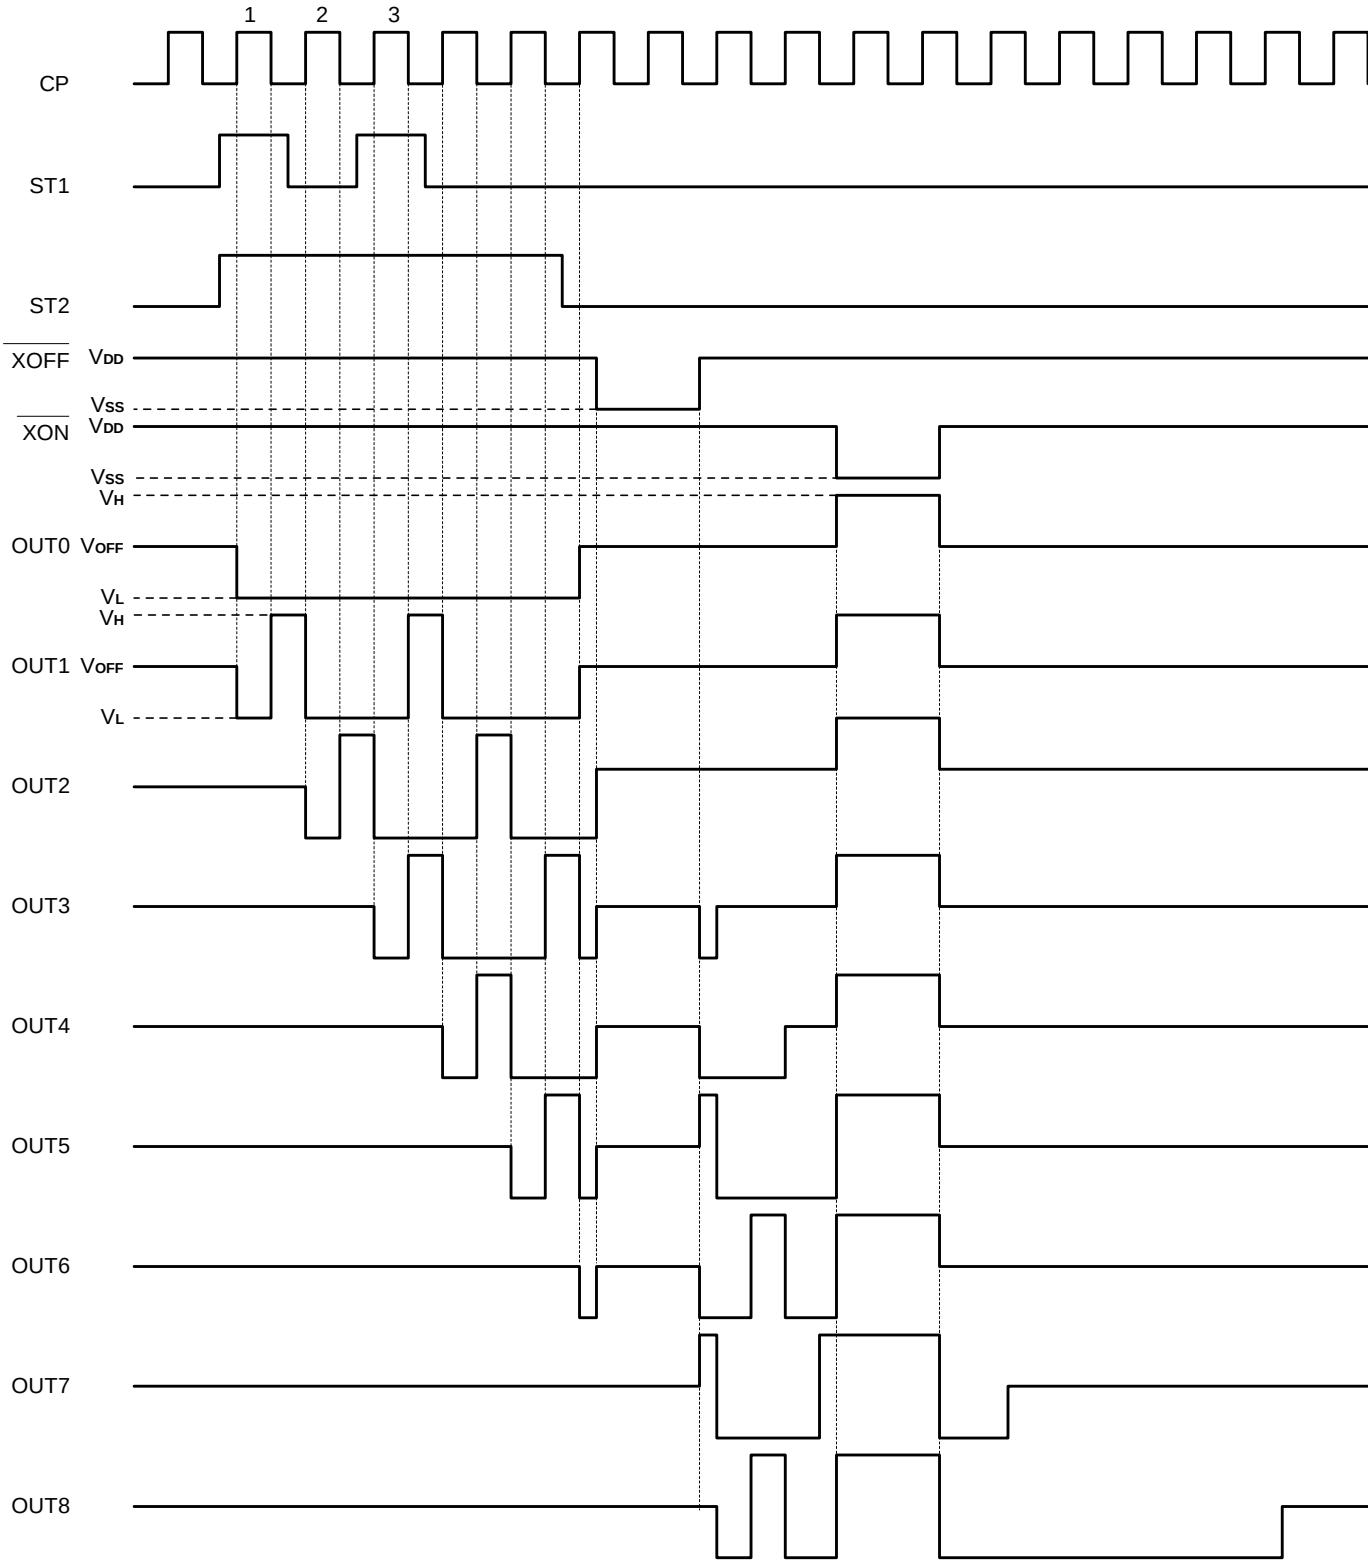

Table 1. Function of $\overline{XON}$ and $\overline{XOFF}$

$\overline{XON}$	$\overline{XOFF}$	OUT0~OUT257
L	X	VH
H	L	VOFF
H	H	Table2

* The outputs are asynchronous to CP.

Table 2. Control of OUT1~OUT256

($\overline{XON}$ = H, $\overline{XOFF}$ = H)

($\overline{R}$/L = L) ST1 ($\overline{R}$/L = H) ST1X	ST2 ST2X	OGW	OUT1~OUT256
L	L	X	VOFF
L	H	X	VL
H	L	X	VL
H	H	L	VH
		H	VH (CP = "L")
			VL (CP = "H")

***** The outputs are synchronous to CP.

Table 3. Control of OUT0 and OUT257

($\overline{XON}$ = H, $\overline{XOFF}$ = H)

($\overline{R}$/L = L) ST1 ($\overline{R}$/L = H) ST1X	ST2 ST2X	OUT0 OUT257
L	L	VOFF
L	H	VL
H	L	VL
H	H	VL

***** The outputs are synchronous to CP.

Absolute Maximum Ratings Over Operating Free-air Temperature Range

Parameter	Symbol	Ratings	Unit
Supply Voltage	VDD	-0.3 ~ +7.0	V
Supply Voltage	VH	-0.3 ~ 42.0	V
Supply Voltage	VL	-20.0 ~ +0.3	V
Supply Voltage	VOFF	VL-0.3 ~ VL+11.0	V
Supply Voltage	VH - VL	-0.3 ~ 42.0	V
Input Voltage	VIN	-0.3 ~ VDD+0.3	V
Storage Temperature	Tstg	-55 ~ 125	°C

Power_on Sequence and Voltage Levels

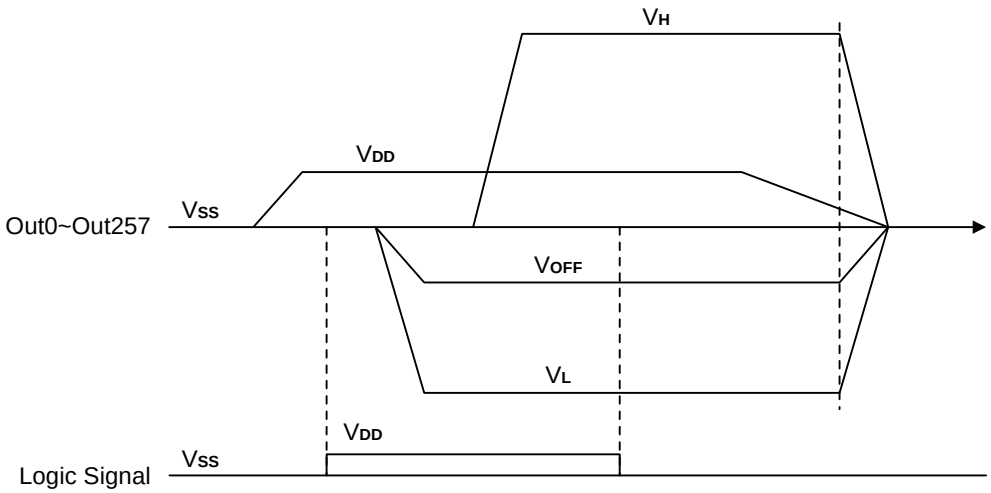

Operating Voltage Range

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V_{DD}	2.7	3.3	3.6	V
Supply Voltage	V_H	17	-	28	V
Supply Voltage	V_L	-15	-	-5	V
Supply Voltage	V_{OFF} - V_L	0	-	10.0	V
Supply Voltage	V_H - V_L	22	-	40	V
Clock Frequency	f_{CP}	-	-	100	KHz
Operating Free-air Temperature	Ta	-20	-	+75	°C

DC Charactertics

(VDD = 2.7~3.6V, Ta = -20~75°C)

Parameter	Symbol	Condition	Min.	Max.	Unit	Applicable Pin	Note
Low Level Input Voltage	V_{IL}		VSS	0.2 X VDD	V	All input pins	
High Level Input Voltage	V_{IH}		0.8 X VDD	VDD	V	All input pins	
Low Level Output Voltage	V_{OL}	I_{OL} = 40µA	VSS	VSS + 0.4	V	ST1, ST2, ST1X, ST2X	
High Level Output Voltage	V_{OH}	I_{OH} = 40µA	VDD -0.4	VDD	V		
Output Resistance (1)	R_L	$V_{OUT} = V_L + 0.5$		1000	Ù	OUT0~OUT257	1
Output Resistance (2)	R_{OFF}	$V_{OUT} = V_{OFF} + 0.5$		1000	Ù	OUT0~OUT257	1
Output Resistance (3)	R_H	$V_{OUT} = V_H - 0.5$		1000	Ù	OUT0~OUT257	1
Input Current	I_I	V_I = VDD / VSS	-5.0	+5.0	µA	All input pins	
Operating Current (1)	I_{DD}			1500	µA	VDD	1, 2
Operating Current (2)	I_H			100	µA	VH	1, 2

Notes:

1. V_H = 25V, V_{OFF} = 0V, V_L = -10V
2. CP = 50KHz

AC Charactertics

(VDD = 2.7~3.6V, Ta = -20~75°C)

Parameter	Symbol	Condition	Min.	Max.	Unit
Clock Frequency	f_{CP}			100	KHz
CP High Pulse Width	t_{CPH}		1		µs
CP Low Pulse Width	t_{CPL}		4		µs
Input Rise Time	tr	10% ~ 90%		50	ns
Input Fall Time	tf	90% ~ 10%		50	ns
Gate Off Time	t_{WOFF}		1		µs
Data Setup Time	t_{SU}		700		ns
Data Hold Time	thd		700		ns
Delay Time 1	tpd1	CL = 20pF		800	ns
Delay Time 2	tpd2	CL = 300pF		1000	ns
Delay Time 3	tpd3	CL = 300pF		1000	ns
Delay Time 4	tpd4	CL = 300pF		1000	ns
Delay Time 5	tpd5	CL = 300pF		1000	ns

Timing Waveform

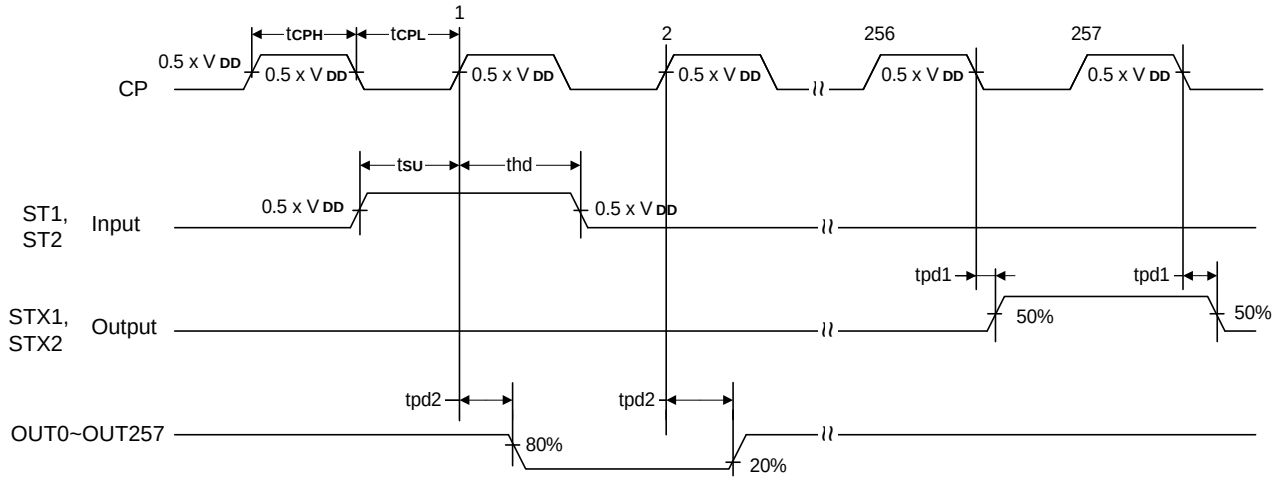

(OGW = H)

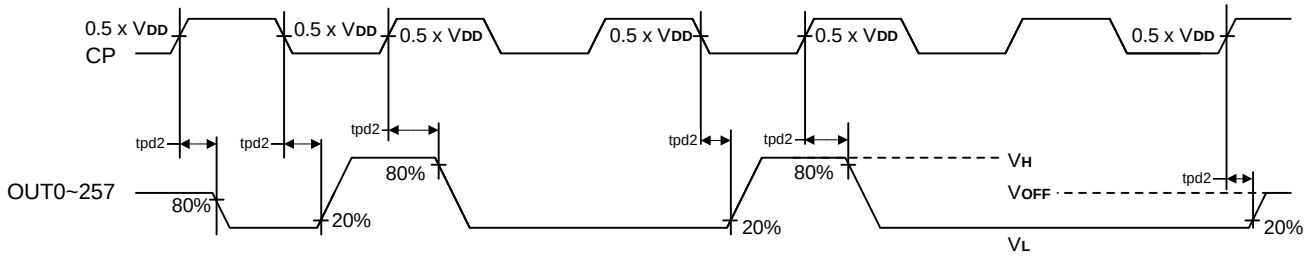

(OGW = L)

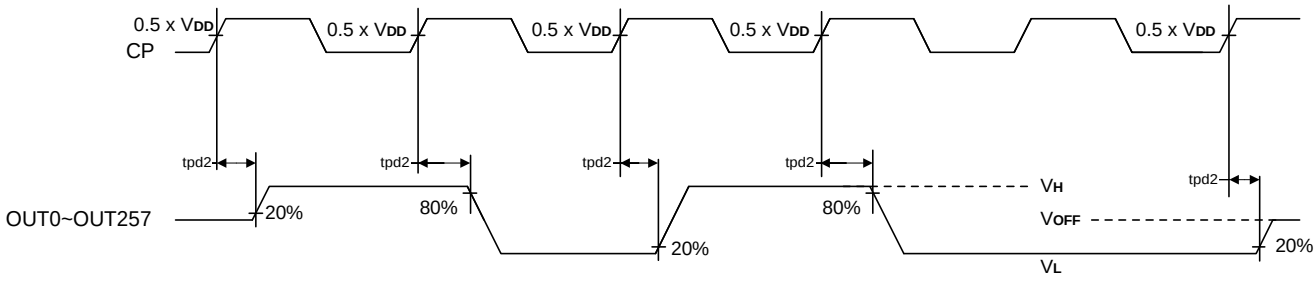

Timing Waveform (continued)

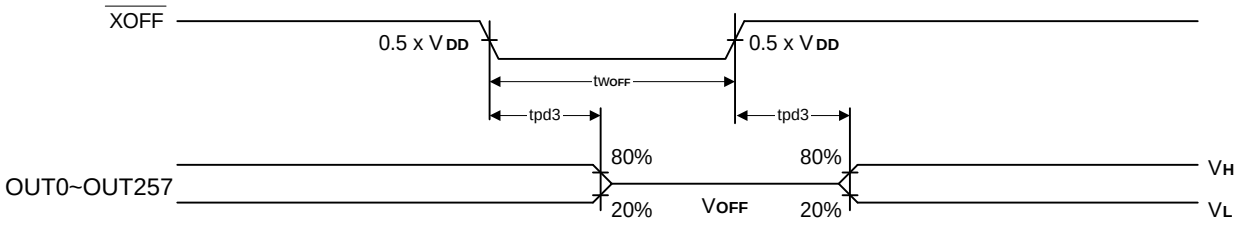

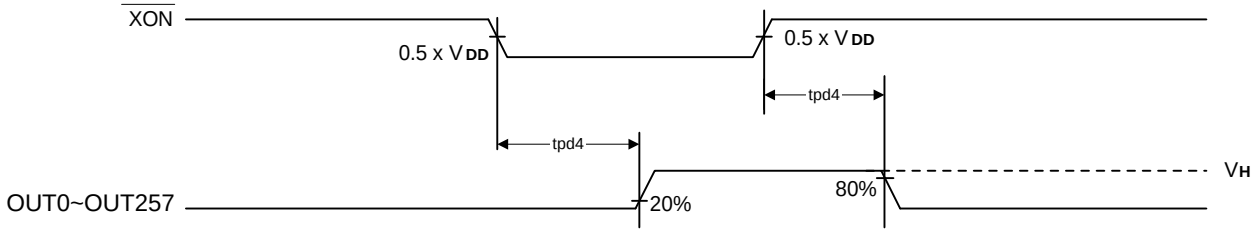

Ordering Information

Part No.	Package
AD120T	TCP